



 [www.randrade.com](http://www.randrade.com) - TLF. 986 600 286

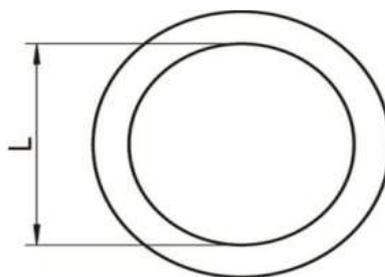

D (mm)	L (mm)	Carga de Trabajo (kg)	Carga de Rotura (kg)
4	25	40	300
4	30	40	300
5	30	60	480
5	40	60	480
6	40	80	700
8	40	150	1250
8	50	150	1250
10	50	300	1950
10	60	300	1950

**COMPOSICIÓN QUÍMICA (en %)**

	C	Mn	Si	P	S	Cr	Ni	Mo	Cu
<b>Mínimo</b>	--	--	--	--	--	16,00	10,00	2,000	--
<b>Máximo</b>	0,080	2,000	1,000	0,045	0,030	18,50	15,00	3,000	4,000

**CARACTERÍSTICAS MECÁNICAS**

	Mínimo	Máximo
<b>Resistencia Tracción – N/mm<sup>2</sup></b>	700,00000	--
<b>Limite Elasticidad – N/mm<sup>2</sup></b>	450,00000	--