




 www.randrade.com - TLF. 986 600 286

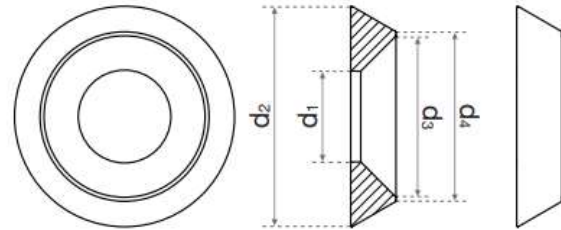

d	M3	M4	M5	M6	M8	M10
d1 min.	3.2	4.3	5.3	6.4	8.4	10.5
d2 max.	10	14	16	18	25	31
d3 min.	6.5	8.6	10.4	12.4	16.4	20.4
h min.	1.8	2.3	2.8	3.3	4.8	5.5
d4	7.3	9.5	11.5	13.5	17.5	21.5

COMPOSICIÓN QUÍMICA (en %)

	C	Mn	Si	P	S	Cr	Ni	Mo	Cu
Mínimo	--	--	--	--	--	16,00	10,00	2,000	--
Máximo	0,080	2,000	1,000	0,045	0,030	18,50	15,00	3,000	4,000

CARACTERÍSTICAS MECÁNICAS

	Mínimo	Máximo
Resistencia Tracción – N/mm ²	700,00000	--
Limite Elasticidad – N/mm ²	450,00000	--